

PPPoE

Document revision 1.6 (Mon Jul 17 14:11:18 GMT 2006)

This document applies to V2.9

Table of Contents

[Table of Contents](#)

[General Information](#)

[Summary](#)

[Quick Setup Guide](#)

[Specifications](#)

[Related Documents](#)

[Additional Documents](#)

[PPPoE Client Setup](#)

[Description](#)

[Property Description](#)

[Example](#)

[Monitoring PPPoE Client](#)

[Property Description](#)

[Example](#)

[PPPoE Server Setup \(Access Concentrator\)](#)

[Description](#)

[Property Description](#)

[Notes](#)

[Example](#)

[PPPoE Users](#)

[Description](#)

[PPPoE Server User Interfaces](#)

[Description](#)

[Property Description](#)

[Example](#)

[Application Examples](#)

[PPPoE in a multipoint wireless 802.11g network](#)

[Troubleshooting](#)

[Description](#)

General Information

Summary

The PPPoE (Point to Point Protocol over Ethernet) protocol provides extensive user management, network management and accounting benefits to ISPs and network administrators. Currently PPPoE is used mainly by ISPs to control client connections for xDSL and cable modems as well as plain Ethernet networks. PPPoE is an extension of the standard Point to Point Protocol (PPP). The difference between them is expressed in transport method: PPPoE employs Ethernet instead of modem connection.

Generally speaking, PPPoE is used to hand out IP addresses to clients based on the user (and workstation, if

desired) authentication as opposed to workstation only authentication, when static IP addresses or DHCP are used. It is advised not to use static IP addresses or DHCP on the same interfaces as PPPoE for obvious security reasons.

MikroTik RouterOS can act as a RADIUS client - you can use a RADIUS server to authenticate PPPoE clients and use accounting for them.

A PPPoE connection is composed of a client and an access concentrator (server). The client may be any computer that has the PPPoE client protocol support installed. The MikroTik RouterOS supports both - client and access concentrator implementations of PPPoE. The PPPoE client and server work over any Ethernet level interface on the router - wireless 802.11 (Aironet, Cisco, WaveLan, Prism, Atheros), 10/100/1000 Mbit/s Ethernet, RadioLan and EoIP (Ethernet over IP tunnel). No encryption, MPPE 40bit RSA and MPPE 128bit RSA encryption is supported.

Note that when RADIUS server is authenticating a user with CHAP, MS-CHAPv1 or MS-CHAPv2, the RADIUS protocol does not use shared secret, it is used only in authentication reply. So if you have a wrong shared secret, RADIUS server will accept the request. You can use `/radius monitor` command to see **bad-replies** parameter. This value should increase whenever a client tries to connect.

Supported connections

- MikroTik RouterOS PPPoE client to any PPPoE server (access concentrator)
- MikroTik RouterOS server (access concentrator) to multiple PPPoE clients (clients are available for almost all operating systems and most routers)

Quick Setup Guide

- To configure MikroTik RouterOS to be a PPPoE client

1. Just add a pppoe-client:

```
/interface pppoe-client add name=pppoe-user-mike user=mike password=123 \  
\... interface=wlan1 service-name=internet disabled=no
```

- To configure MikroTik RouterOS to be an Access Concentrator (PPPoE Server)

1. Add an address pool for the clients from **10.1.1.62** to **10.1.1.72**, called pppoe-pool:

```
/ip pool add name="pppoe-pool" ranges=10.1.1.62-10.1.1.72
```

2. Add PPP profile, called **pppoe-profile** where **local-address** will be the router's address and clients will have an address from **pppoe-pool**:

```
/ppp profile add name="pppoe-profile" local-address=10.1.1.1 remote-address=pppoe-pool
```

3. Add a user with username **mike** and password **123**:

```
/ppp secret add name=mike password=123 service=pppoe profile=pppoe-profile
```

4. Now add a pppoe server:

```
/interface pppoe-server add service-name=internet interface=wlan1 \  
\... default-profile=pppoe-profile
```

Specifications

Packages required: *ppp*

License required: *level1 (limited to 1 interface), level3 (limited to 200 interfaces), level4 (limited to 200 interfaces), level5 (limited to 500 interfaces), level6 (unlimited)*

Home menu level: */interface pppoe-server, /interface pppoe-client*

Standards and Technologies: [*PPPoE \(RFC 2516\)*](#)

Hardware usage: *PPPoE server may require additional RAM (uses approx. 9KiB (plus extra 10KiB for packet queue, if data rate limitation is used) for each connection) and CPU power. Maximum of 65535 connections is supported.*

Related Documents

- [Software Package Management](#)
- [IP Addresses and ARP](#)
- [RADIUS client](#)
- [PPP User AAA](#)
- [Log Management](#)

Additional Documents

Links for PPPoE documentation:

- <http://www.faqs.org/rfcs/rfc2516.html>

PPPoE Clients:

- RASPPPoE for Windows 95, 98, 98SE, ME, NT4, 2000, XP, .NET
<http://www.raspppoe.com/>

PPPoE Client Setup

Home menu level: */interface pppoe-client*

Description

The PPPoE client supports high-speed connections. It is fully compatible with the MikroTik PPPoE server (access concentrator).

Note for Windows. Some connection instructions may use the form where the "phone number", such as "MikroTik_AC\mt1", to indicate that "MikroTik_AC" is the access concentrator name and "mt1" is the service name.

Property Description

ac-name (*text*; default: "") - this may be left blank and the client will connect to any access concentrator that offers the "service" name selected

add-default-route (*yes | no*; default: **no**) - whether to add a default route automatically

allow (*multiple choice: mschap2, mschap1, chap, pap*; default: **mschap2, mschap1, chap, pap**) - the protocol to allow the client to use for authentication

dial-on-demand (*yes | no*; default: **no**) - connects to AC only when outbound traffic is generated and disconnects when there is no traffic for the period set in the idle-timeout value

interface (*name*) - interface the PPPoE server can be connected through

mru (*integer*; default: **1480**) - Maximum Receive Unit. The optimal value is the MTU of the interface the tunnel is working over decreased by 20 (so, for 1500-byte ethernet link, set the MTU to 1480 to avoid fragmentation of packets)

mtu (*integer*; default: **1480**) - Maximum Transmission Unit. The optimal value is the MTU of the interface the tunnel is working over decreased by 20 (so, for 1500-byte ethernet link, set the MTU to 1480 to avoid fragmentation of packets)

name (*name*; default: **pppoe-out1**) - name of the PPPoE interface

password (*text*; default: **""**) - a user password used to connect the PPPoE server

profile (*name*) - default profile for the connection

service-name (*text*; default: **""**) - specifies the service name set on the access concentrator. Leave it blank unless you have many services and need to specify the one you need to connect to

use-peer-dns (*yes | no*; default: **no**) - whether to set the router's default DNS to the PPP peer DNS (i.e. whether to get DNS settings from the peer)

user (*text*; default: **""**) - a user name that is present on the PPPoE server

Example

To add and enable PPPoE client on the **gig** interface connecting to the AC that provides **testSN** service using user name **john** with the password **password**:

```
[admin@RemoteOffice] interface pppoe-client> add interface=gig \  
 \... service-name=testSN user=john password=password disabled=no  
[admin@RemoteOffice] interface pppoe-client> print  
Flags: X - disabled, R - running  
0 R name="pppoe-out1" mtu=1480 mru=1480 interface=gig user="john"  
 password="password" profile=default service-name="testSN" ac-name=""  
 add-default-route=no dial-on-demand=no use-peer-dns=no
```

Monitoring PPPoE Client

Command name: **/interface pppoe-client monitor**

Property Description

ac-mac (*MAC address*) - MAC address of the access concentrator (AC) the client is connected to

ac-name (*text*) - name of the AC the client is connected to

encoding (*text*) - encryption and encoding (if asymmetric, separated with '/') being used in this connection

service-name (*text*) - name of the service the client is connected to

status (*text*) - status of the client

- **Dialing** - attempting to make a connection

- **Verifying password...** - connection has been established to the server, password verification in progress
- **Connected** - self-explanatory
- **Terminated** - interface is not enabled or the other side will not establish a connection uptime (time) - connection time displayed in days, hours, minutes and seconds

uptime (*time*) - connection time displayed in days, hours, minutes and seconds

Example

To monitor the **pppoe-out1** connection:

```
[admin@MikroTik] interface pppoe-client> monitor pppoe-out1
      status: "connected"
      uptime: 10s
      encoding: "none"
      service-name: "testSN"
      ac-name: "10.0.0.1"
      ac-mac: 00:C0:DF:07:5E:E6

[admin@MikroTik] interface pppoe-client>
```

PPPoE Server Setup (Access Concentrator)

Home menu level: */interface pppoe-server server*

Description

The PPPoE server (access concentrator) supports multiple servers for each interface - with differing service names. Currently the throughput of the PPPoE server has been tested to 160 Mb/s on a Celeron 600 CPU. Using higher speed CPUs, throughput should increase proportionately.

The **access concentrator name** and PPPoE **service name** are used by clients to identify the access concentrator to register with. The **access concentrator name** is the same as the **identity** of the router displayed before the command prompt. The identity may be set within the **/system identity** submenu.

PPPoE users are created in **/ppp secret** menu, see the [AAA](#) manual for further information.

Note that if no service name is specified in WindowsXP, it will use only service with no name. So if you want to serve WindowsXP clients, leave your service name empty.

Property Description

authentication (*multiple choice: mschap2 | mschap1 | chap | pap*; default: **mschap2, mschap1, chap, pap**) - authentication algorithm

default-profile (*name*; default: **default**) - default profile to use

interface (*name*) - interface to which the clients will connect to

keepalive-timeout (*time*; default: **10**) - defines the time period (in seconds) after which the router is starting to send keepalive packets every second. If no traffic and no keepalive responses has come for that period of time (i.e. 2 * keepalive-timeout), not responding client is proclaimed disconnected.

max-mru (*integer*; default: **1480**) - Maximum Receive Unit. The optimal value is the MTU of the

interface the tunnel is working over decreased by 20 (so, for 1500-byte Ethernet link, set the MTU to 1480 to avoid fragmentation of packets)

max-mtu (*integer*; default: **1480**) - Maximum Transmission Unit. The optimal value is the MTU of the interface the tunnel is working over decreased by 20 (so, for 1500-byte Ethernet link, set the MTU to 1480 to avoid fragmentation of packets)

max-sessions (*integer*; default: **0**) - maximum number of clients that the AC can serve

- **0** - unlimited

one-session-per-host (*yes | no*; default: **no**) - allow only one session per host (determined by MAC address). If a host will try to establish a new session, the old one will be closed

service-name (*text*) - the PPPoE service name

Notes

The default **keepalive-timeout** value of **10** is OK in most cases. If you set it to **0**, the router will not disconnect clients until they log out or router is restarted. To resolve this problem, the **one-session-per-host** property can be used.

Security issue: do not assign an IP address to the interface you will be receiving the PPPoE requests on.

Example

To add PPPoE server on **ether1** interface providing **ex** service and allowing only one connection per host:

```
[admin@MikroTik] interface pppoe-server server> add interface=ether1 \  
\... service-name=ex one-session-per-host=yes  
[admin@MikroTik] interface pppoe-server server> print  
Flags: X - disabled  
 0 X service-name="ex" interface=ether1 mtu=1480 mru=1480  
    authentication=mschap2,mschap,chap,pap keepalive-timeout=10  
    one-session-per-host=yes default-profile=default  
[admin@MikroTik] interface pppoe-server server>
```

PPPoE Users

Description

The PPPoE users are authenticated through a RADIUS server (if configured), and if RADIUS fails, then the local PPP user database is used. See the respective manual sections for more information:

- [RADIUS client](#)
- [PPP User AAA](#)

PPPoE Server User Interfaces

Home menu level: */interface pppoe-server*

Description

This menu allows you to see all the connected users, as well as to set static interface names to be used in

different configurations, where unchangable interface needs to be specified (and, thus, dynamic names cannot be used)

Property Description

encoding (*read-only: text*) - encryption and encoding (if asymmetric, separated with '/') being used in this connection

name (*name*) - interface name

remote-address (*read-only: MAC address*) - MAC address of the connected client

service-name (*name*) - name of the service the user is connected to

uptime (*time*) - shows how long the client is connected

user (*name*) - the name of the connected user (must be present in the user database anyway)

Example

To view the currently connected users:

```
[admin@MikroTik] interface pppoe-server> print
Flags: R - running
#  NAME          SERVICE REMOTE-ADDRESS  USER  ENCO... UPTIME
0  R <pppoe-ex>  ex        00:C0:CA:16:16:A5  ex    12s

[admin@MikroTik] interface pppoe-server>
```

To disconnect the user **ex**:

```
[admin@MikroTik] interface pppoe-server> remove [find user=ex]
[admin@MikroTik] interface pppoe-server> print

[admin@MikroTik] interface pppoe-server>
```


Application Examples

PPPoE in a multipoint wireless 802.11g network

In a wireless network, the PPPoE server may be attached to an Access Point (as well as to a regular station of wireless infrastructure). Either our RouterOS client or Windows PPPoE clients may connect to the Access Point for PPPoE authentication. Further, for RouterOS clients, the radio interface may be set to MTU 1600 so that the PPPoE interface may be set to MTU 1500. This optimizes the transmission of 1500 byte packets and avoids any problems associated with MTUs lower than 1500. It has not been determined how to change the MTU of the Windows wireless interface at this moment.

Let us consider the following setup where the MikroTik Wireless AP offers wireless clients transparent access to the local network with authentication:

Network:
10.1.0.0/24

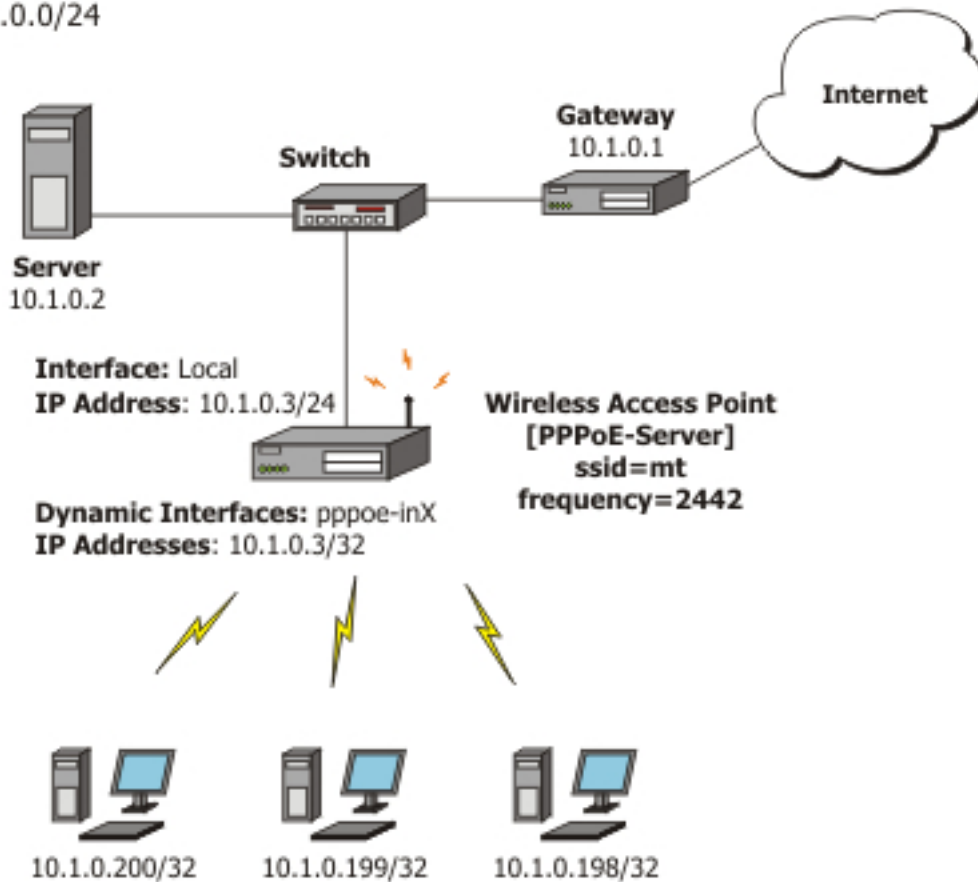

Wireless PPPoE Clients (address range 10.1.0.100-10.1.0.200)

First of all, the wireless interface should be configured:

```
[admin@PPPoE-Server] interface wireless> set 0 mode=ap-bridge \  
  frequency=2442 band=2.4ghz-b/g ssid=mt disabled=no  
[admin@PPPoE-Server] interface wireless> print  
Flags: X - disabled, R - running  
0  name="wlan1" mtu=1500 mac-address=00:01:24:70:53:04 arp=enabled  
  disable-running-check=no interface-type=Atheros AR5211  
  radio-name="000124705304" mode=station ssid="mt" area=""  
  frequency-mode=superchannel country=no_country_set antenna-gain=0  
  frequency=2412 band=2.4ghz-b scan-list=default rate-set=default  
  supported-rates-b=1Mbps, 2Mbps, 5.5Mbps, 11Mbps  
  supported-rates-a/g=6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,  
    54Mbps  
  basic-rates-b=1Mbps basic-rates-a/g=6Mbps max-station-count=2007  
  ack-timeout=dynamic tx-power=default tx-power-mode=default  
  noise-floor-threshold=default periodic-calibration=default  
  burst-time=disabled fast-frames=no dfs-mode=none antenna-mode=ant-a  
  wds-mode=disabled wds-default-bridge=none wds-ignore-ssid=no  
  update-stats-interval=disabled default-authentication=yes  
  default-forwarding=yes default-ap-tx-limit=0 default-client-tx-limit=0  
  hide-ssid=no security-profile=default disconnect-timeout=3s  
  on-fail-retry-time=100ms preamble-mode=both  
[admin@PPPoE-Server] interface wireless>
```

Now, configure the Ethernet interface, add the IP address and set the default route:

```
[admin@PPPoE-Server] ip address> add address=10.1.0.3/24 interface=Local
```

```
[admin@PPPoE-Server] ip address> print
Flags: X - disabled, I - invalid, D - dynamic
# ADDRESS NETWORK BROADCAST INTERFACE
0 10.1.0.3/24 10.1.0.0 10.1.0.255 Local
[admin@PPPoE-Server] ip address> /ip route
[admin@PPPoE-Server] ip route> add gateway=10.1.0.1
[admin@PPPoE-Server] ip route> print
Flags: X - disabled, A - active, D - dynamic,
C - connect, S - static, r - rip, b - bgp, o - ospf
# DST-ADDRESS G GATEWAY DISTANCE INTERFACE
0 ADC 10.1.0.0/24 Local
1 A S 0.0.0.0/0 r 10.1.0.1 1 Local
[admin@PPPoE-Server] ip route> /interface ethernet
[admin@PPPoE-Server] interface ethernet> set Local arp=proxy-arp
[admin@PPPoE-Server] interface ethernet> print
Flags: X - disabled, R - running
# NAME MTU MAC-ADDRESS ARP
0 R Local 1500 00:0C:42:03:25:53 proxy-arp
[admin@PPPoE-Server] interface ethernet>
```

We should add PPPoE server to the wireless interface:

```
[admin@PPPoE-Server] interface pppoe-server server> add interface=wlan1 \
service-name=mt one-session-per-host=yes disabled=no
[admin@PPPoE-Server] interface pppoe-server server> print
Flags: X - disabled
0 service-name="mt" interface=wlan1 max-mtu=1480 max-mru=1480
authentication=pap,chap,mschap1,mschap2 keepalive-timeout=10
one-session-per-host=yes max-sessions=0 default-profile=default
[admin@PPPoE-Server] interface pppoe-server server>
```

Finally, we can set up PPPoE clients:

```
[admin@PPPoE-Server] ip pool> add name=pppoe ranges=10.1.0.100-10.1.0.200
[admin@PPPoE-Server] ip pool> print
# NAME RANGES
0 pppoe 10.1.0.100-10.1.0.200
[admin@PPPoE-Server] ip pool> /ppp profile
[admin@PPPoE-Server] ppp profile> set default use-encryption=yes \
local-address=10.1.0.3 remote-address=pppoe
[admin@PPPoE-Server] ppp profile> print
Flags: * - default
0 * name="default" local-address=10.1.0.3 remote-address=pppoe
use-compression=no use-vj-compression=no use-encryption=yes only-one=no
change-tcp-mss=yes

1 * name="default-encryption" use-compression=default
use-vj-compression=default use-encryption=yes only-one=default
change-tcp-mss=default
[admin@PPPoE-Server] ppp profile> .. secret
[admin@PPPoE-Server] ppp secret> add name=w password=wkst service=pppoe
[admin@PPPoE-Server] ppp secret> add name=l password=ltp service=pppoe
[admin@PPPoE-Server] ppp secret> print
Flags: X - disabled
# NAME SERVICE CALLER-ID PASSWORD PROFILE REMOTE-ADDRESS
0 w pppoe pppoe wkst default 0.0.0.0
1 l pppoe pppoe ltp default 0.0.0.0
[admin@PPPoE-Server] ppp secret>
```

Thus we have completed the configuration and added two users: **w** and **l** who are able to connect to Internet, using PPPoE client software.

Note that Windows XP built-in client supports encryption, but RASPPPOE does not. So, if it is planned not to support Windows clients older than Windows XP, it is recommended to switch **require-encryption** to **yes** value in the **default** profile configuration. In other case, the server will accept clients that do not encrypt data.

Troubleshooting

Description

- **I can connect to my PPPoE server. The ping goes even through it, but I still cannot open web pages**
Make sure that you have specified a valid DNS server in the router (in `/ip dns` or in `/ppp profile` the `dns-server` parameter).
- **The PPPoE server shows more than one active user entry for one client, when the clients disconnect, they are still shown and active**
Set the `keepalive-timeout` parameter (in the PPPoE server configuration) to **10** if You want clients to be considered logged off if they do not respond for 10 seconds.
Note that if the `keepalive-timeout` parameter is set to **0** and the `only-one` parameter (in PPP profile settings) is set to **yes** then the clients might be able to connect only once. To resolve this problem `one-session-per-host` parameter in PPPoE server configuration should be set to **yes**
- **I can get through the PPPoE link only small packets (eg. pings)**
You need to change `mss` of all the packets passing through the PPPoE link to the value of PPPoE link's MTU-40 at least on one of the peers. So for PPPoE link with MTU of 1480:

```
[admin@MT] interface pppoe-server server> set 0 max-mtu=1440 max-mru=1440
[admin@MT] interface pppoe-server server> print
Flags: X - disabled
0  service-name="mt" interface=wlan1 max-mtu=1440 max-mru=1440
   authentication=pap,chap,mschap1,mschap2 keepalive-timeout=10
   one-session-per-host=yes max-sessions=0 default-profile=default
[admin@MT] interface pppoe-server server>
```

- **My windows PPPoE client obtains IP address and default gateway from the MikroTik PPPoE server, but it cannot ping beyond the PPPoE server and use the Internet**
PPPoE server is not bridging the clients. Configure masquerading for the PPPoE client addresses, or make sure you have proper routing for the address space used by the clients, or you enable Proxy-ARP on the Ethernet interface (See the IP Addresses and Address Resolution Protocol (ARP) Manual)
- **My Windows XP client cannot connect to the PPPoE server**
You have to specify the "Service Name" in the properties of the XP PPPoE client. If the service name is not set, or it does not match the service name of the MikroTik PPPoE server, you get the "line is busy" errors, or the system shows "verifying password - unknown error"
- **I want to have logs for PPPoE connection establishment**
Configure the logging feature under the `/system logging facility` and enable the PPP type logs